



# 5-7t

## G SERIES INTERNAL COMBUSTION COUNTERBALANCED FORKLIFT TRUCK



- › Fashion streamline appearance
- › Dual suspension damping structure reduces whole truck vibration and driver's fatigue;
- › Noise around ear and truck sound power level are reduced by full sealed cab and optimal design of the parts around engine.
- › With wholly hydraulic drive cooling system, aluminum radiator and special layout, the water and transmission oil temperature are reduced greatly.
- › Man-machine engineering design improves operation comfort; wide view lifting system improves vision.
- › Standard configuration of electric-hydraulic reversing system has light and easy operation; updated new intelligent gear shifting system avoiding start with second gear improves transmission box's reliability.
- › Wider internal space, more reasonable parts layout and 80°hood opening angle make maintenance easy.
- › The emission of the completed truck meets EURO III (B) and Tier IV ( I ) emission standards. DPF technology is applied in exhaust treatment.



# HELI

Heli UK • Unit 10 • Hewitts Ind Est • Elmbridge Road  
Cranleigh • Surrey • GU6 8LW • United Kingdom  
[www.heliuk.com](http://www.heliuk.com)

# G SERIES INTERNAL COMBUSTION COUNTERBALANCED FORKLIFT TRUCK **5-7t**

Characteristics						
1.01	Manufacturer		<b>HELI</b>			
1.02	Model		CPCD50-P3G	CPCD60-P3G	CPCD70-P3G	
1.03	Load Capacity	kg	5000	6000	7000	
1.04	Load Center	mm	600			
1.05	Power Type		Diesel			
1.06	Driving style		Seated			
Tire						
2.01	Front Tire		8.25-15-14PR			
Dimension Parameter						
3.01	Lifting Height(standard)	H	mm	3000		
3.02	Mast Tilt(fwd/bwd)	$\alpha/\beta$	deg	6/12		
3.03	Min.Turning Radius	r	mm	3240	3300	3370
3.04	Overall Length(with Forks)	L	mm	4710	4790	4840
3.05	Overall Width	W1	mm	2045		
3.06	Overall Height(mast without activity)	H4	mm	2450		
3.07	Wheel Base	L1	mm	2300	2300	2300
3.08	Tread(fwd/bwd)	W3/W2	mm	1520/1700	1520/1700	1520/1700
3.09	Overhang(fwd/bwd)	L2/L3	mm	590/600	595/675	600/720
3.10	Min.Under clearance	H5	mm	200		
3.11	Lateral Fork Adjustment(Outside of Forks)	W5	mm	300-1845		
3.12	Fork Length	L4	mm	1220		
3.13	Fork Width/Thickness	W/T	mm	55/150	60/150	65/150
Performance Parameter						
4.01	Lifting Speed(Unloaded/Loaded)	mm/s	560/500	550/490	550/480	
4.02	Lowing Speed(Loaded)	mm/s	WITHOUT LOAD $\geq$ 300 WITH FULL LOAD $\leq$ 600			
4.03	Traveling Speed(Loaded/Unloaded)	km/h	25/28	25/28	25/28	
4.04	Max.Gradeability	%	34/19	31/19	29/19	
Engine and Gearbox						
5.01	Engine Manufacturer/Model		Perkins 1204E-E44TA (Euro IIIB, EPA Tier 4i)			
5.02	Cyl. Number		4			
5.03	Displacement	L	4.4			
5.04	Rated Power/Rated Speed	Kw/rpm	82/2200			
5.05	Max. Torque/Rated Speed	Nm/rpm	450/1400			
5.06	Gearbox		Intelligent gear shifting			

CPD50      CPD60      CPD70

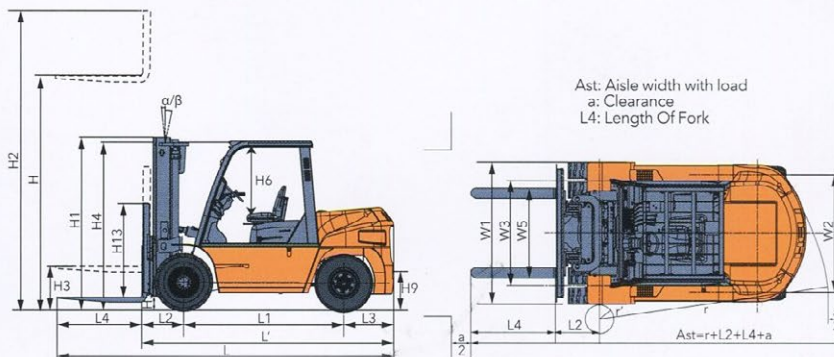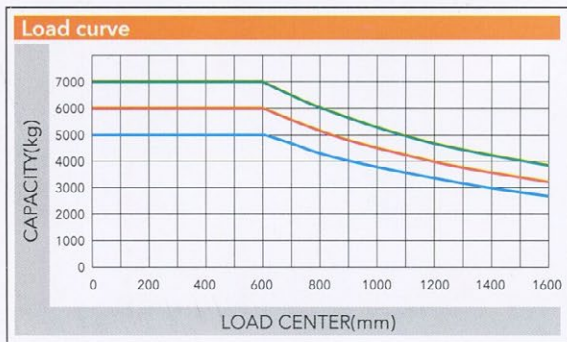

# HELI

Heli UK • Unit 10 • Hewitts Ind Est • Elmbridge Road  
Cranleigh • Surrey • GU6 8LW • United Kingdom  
[www.heliuk.com](http://www.heliuk.com)